



### HOMOGENIZING MIXER BECOMIX RW 2500 CD + AB 1200

For efficient production at industrial scale.

Ideal for the production of emulsions, gels, suspensions, creams, lotions, toothpastes and pastes.

#### Technical Data – RW 2500 CD

- Usable volume: approx. 2,500 liters
- Total volume: approx. 3,000–3,500 liters (depending on configuration)
- Minimum volume: approx. 500–800 liters (depending on process)
- Permissible vessel pressure (product): -1 to +3 bar (abs.)
- Jacket pressure: up to 5 bar (abs.)
- Material (product-contact parts): stainless steel 1.4404
- Material (heating jacket): stainless steel 1.4541
- Other stainless steel parts: 1.4301 / 1.4541
- Permissible product temperature: up to approx. 134

- Permissible jacket temperature: up to approx. 152 °C

#### Features – RW 2500 CD

Anchor agitator with scrapers and flow breakers

- Efficient mixing of high-viscosity products
- Prevents product build-up and improves heat transfer

High-performance homogenizer (internal/external)

- Reversible rotation (homogenizing / pumping mode)
- High shear forces for fine dispersion and stable emulsions
- Internal and external circulation possible

Additional equipment

- Recirculation line for external homogenization
- Hydraulically liftable lid
- Heating, cooling and vacuum operation
- CIP cleaning system
- Modern control system with touchscreen

### Advantages

- High production capacity for industrial applications
- Reproducible and consistent product quality
- Efficient mixing, dispersing and homogenizing
- Hygienic design and easy cleaning (CIP)
- Suitable for pharmaceutical, cosmetic and food applications

### Preparation Vessel AB 1200

#### Technical Data

- Usable volume: approx. 1,200 liters
- Total volume: approx. 1,500–1,800 liters (depending on configuration)
- Permissible vessel pressure: 0–3 bar (abs.)
- Jacket pressure: up to 5 bar (abs.)
- Materials: same as RW 2500 CD
- Product temperature: up to approx. 134 °C

### Features

- Turbo agitator / dissolver
- Direct heating and cooling
- Various suction options for liquids and powders
- CIP cleaning system
- Optional: load cells and dosing systems


### Utility Requirements

- Cooling water: approx. 8–12 m<sup>3</sup>/h at 3–5 bar
- Cooling water (vacuum pump): approx. 0.5–1.0 m<sup>3</sup>/h
- Compressed air: approx. 2000–4000 L/min at 6–8 bar
- Power supply: 3 × 400 V / 50 Hz, approx. 150–300 kVA
- Steam: approx. 6–10 bar, approx. 850 kg/h


### Availability

Inspection possible by appointment

Delivery time: on request / depending on project scope

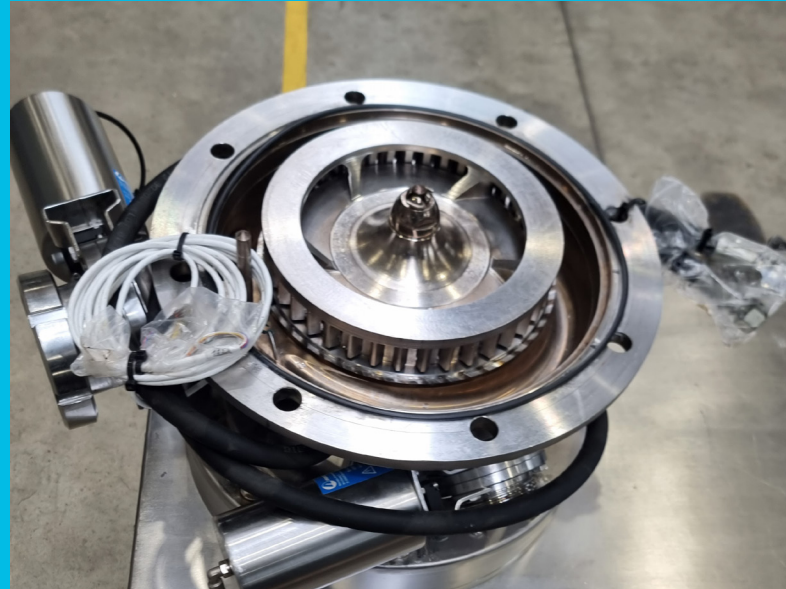

Homogenizer RW 2500 S

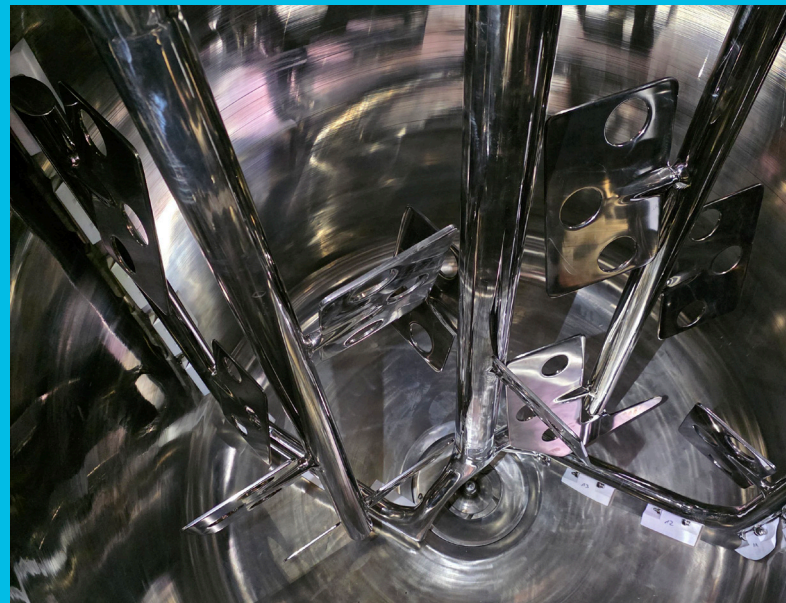

Agitator RW2500 S



This is a non-binding offer from SEEFRIED Verfahrenstechnik GmbH as an independent supplier. There is no business relationship with the manufacturer. All trademarks mentioned are the property of their respective owners and are used solely for the purpose of identifying the products offered. This is not an offer from the manufacturer.

**SEEFRIED** Verfahrenstechnik GmbH

An der Brake 45

28844 Weyhe

Germany

**Tel.** +49 (0) 172 9591625

**Mail** [info@s-vt.net](mailto:info@s-vt.net)

**Web** [www.s-vt.net](http://www.s-vt.net)

