



HOMOGENIZING MIXER BECOMIX RW 60 CD + AB 50

For efficient development and reliable production.

Ideal for the production of emulsions, gels, suspensions, toothpastes and pastes.

Technical Data – RW 60 CD

- Usable volume: 60 liters
- Total volume: approx. 92 liters
- Minimum volume: approx. 20 liters
- Permissible vessel pressure (product): 0–3 bar (abs.)
- Permissible jacket pressure: 5 bar (abs.)
- Material (product-contact parts): 1.4404
- Material (heating jacket): 1.4541
- Other stainless steel parts: 1.4301 / 1.4541
- Permissible product temperature: 134 °C
- Permissible jacket temperature: 152 °C

Equipment – RW 60 CD

- Anchor agitator with baffle and PTFE scrapers
Peripheral speed: 0.6 – 3.6 m/s
Power: 2.2 kW
- High-performance homogenizer (internal/external)
Peripheral speed: 5 – 25 m/s
Power: 8 kW
Reversible rotor direction
Recirculation line DN 40
- Additional equipment
Water ring vacuum pump (50 m³/h, 2 kW)
Secondary heating system with 2 heat exchangers (18 kW)
Flexible suction options (diaphragm valve)
CIP cleaning system
Modern IPC control system with 19" touchscreen

Advantages:
High process flexibility
Reproducible product quality
Easy cleaning (CIP)

Preparation Vessel AB 50

Technical Data

- Usable volume: 50 liters
- Total volume: approx. 87.5 liters
- Minimum volume: approx. 15 liters
- Permissible vessel pressure: 0–3 bar (abs.)
- Jacket pressure: 5 bar (abs.)
- Materials: same as RW 60 CD
- Product temperature: up to 134 °C

Equipment

- Turbo agitator (1.8 kW)
- Peripheral speed: approx. 3 – 17 m/s
- Direct heating
- Various suction options
- CIP cleaning system

Utility Requirements

- Cooling water: approx. 1.5 m³/h at 3 bar
- Cooling water (vacuum pump): approx. 0.3 m³/h at ≥ 2 bar
- Compressed air: approx. 300 L/min at 8 bar
- Power supply: 3 × 400 V / 50 Hz, 45 kVA
- Steam: 6–8 bar, approx. 45 kg/h


Availability

Inspection possible by appointment in Bremen

Delivery time: approx. 4–8 weeks



Homogenizing Mixer RW60 Agitator & Homogenizer

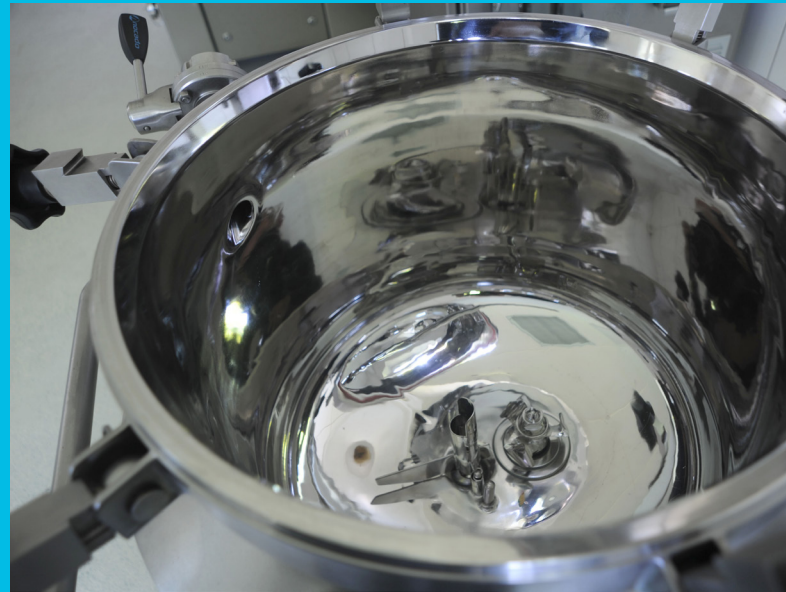

Premix with Turbodissolver



SEEFRIED Verfahrenstechnik GmbH

An der Brake 45

28844 Weyhe

Germany

Tel. +49 (0) 172 9591625

Mail info@s-vt.net

Web www.s-vt.net

